

DEDICATED WELLHEAD CLOSURES

Wellhead closures provide a necessary and convenient means of terminating dedicated tubing to the wellhead, supporting the pump, and housing the air water fittings.

All GeoPump Wellhead Closures Feature:

- Tough Type I PVC construction with stainless steel hardware.
- .875 - inch water level access port.
- 36 - inch water discharge tube extension (stores in the water level access port).

- All necessary fittings installed. The fittings that mount on the wellhead closure are included with the downwell component selection for each well (bladder pump, purge pump, packer, etc.).


Three Standard Closure Styles Are Available:

1. Bell Cap, non-lockable.
2. Flat Cap, non-lockable.
3. Indented, non-lockable.

Indented, Non-lockable

Indented closures are available for wells up to 6 inches. They are recommended for wells within vaults or protective casing where there is inadequate clearance for tube fittings between the top of the well casing and the lid of the protective casing.

MODEL#	WELL SIZE	STYLE	A	B
5830	2"	Indented	1.75	2.25
5830	3"	Indented	2.75	2.25
5329	4"	Indented	3.50	3.50
5329	5"	Indented	3.50	3.38
5329	6"	Indented	3.50	3.25

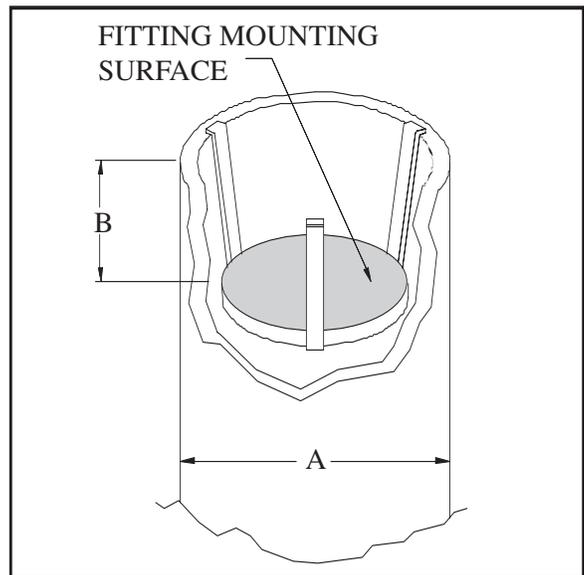


DEDICATED WELLHEAD CLOSURES

Bell Cap, Non-lockable

The non-lockable Bell Cap is available for 1.5 and 2-inch wells and is recommended when numerous fittings must be mounted to the closure plate. When using on the wells within a vault or protective casing, be sure that there is adequate vertical and diametral clearance for installation.

MODEL #	WELL SIZE	STYLE	A	B	C
5492	1.5"	Non-lockable Bell Cap	1.90	4.00	2.75
5493	2"	Non-lockable Bell Cap	2.30	4.00	2.75

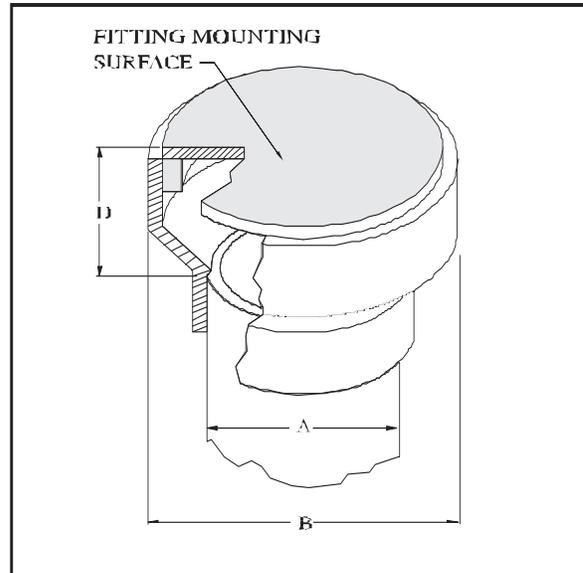

Flat Cap, Non-lockable

This style closure is available for all size well casings (sizes larger than 4-inch may have a slightly domed top). It is recommended for use on wells inside protective casings or vaults where there is adequate clearance for the tube fittings between the top to the well casing and the lid of the protective casing.

MODEL #	WELL SIZE	STYLE	A	B	C	D
5870	2"	Non-lockable Flat Cap	2.38	2.70	0.25	1.80
5494	3"	Non-lockable Flat Cap	3.50	4.00	0.25	1.85
5422	4"	Non-lockable Flat Cap	4.50	5.00	0.25	2.30
5442	6"	Non-lockable Flat Cap	6.62	7.25	0.25	3.35

